



Remote Control System

Features:

- Up to 200m Range
- 868MHz FM Technology
- 1 – 4 Channels each 1000W
- Waterproof Receiver (IP68)
- High Security RF Protocol
- 2 / 4 Changeover Relays Contacts Rated 5A @ 230Vac
- 6-32Vdc/ac 230Vac versions Available
- Outputs Momentary or Latching
- Any Switch Map to Any Relay
- Systems supplied 'ready to Go'
- 1 Fobber per system
- FCC Certified and CE Compliant
- Maximum 30 Button Pairings

Intended Use

- Commercial/Industrial Remote Control
- Electric Gates
- Roller Shutter Doors

Description

A versatile general purpose Remote Control System for many different applications. Housed in a rugged IP68 weatherproof enclosure, The new HORNETPRO system is ideally suited to any remote switch requirement. With up to 4 changeover Relay switch outputs each output can be controlled from any switch on any transmitter. Additional transmitters may be added to the system using the same 'easy-learn' process without opening the enclosure.

Installation is by screw terminals to the power supply and the output relay contacts. The output relays are activated by the button press on the transmitter encoder.



Systems Part Numbers

Part Number	Description	Power Supply
HORNETPRO-8S1	1 channel System	6-32Vac/dc
HORNETPRO-8S2	2 channel System	
HORNETPRO-8S3	3 channel System	
HORNETPRO-8S4	4 channel System	

Part Number	Description	Power Supply
HORNETPRO-8S1M	1 channel System	230Vac
HORNETPRO-8S2M	2 channel System	



Additional Transmitters



Part Number	Description	Range*
FOBBER-8T1	1 Sw	200m
FOBBER-8T2	2 Sw	200m
FOBBER-8T3	3Sw	200m
FOBBER-8T4	4 Sw	200m
FOBBER-8T6	4 ch 6 Sw	200m
FOBBER-8T8	8 Sw	200m
FOBBER-8TL1	2 button 1ch ON/OFF	200m
FOBBER-8TL2	4 button 2ch ON/OFF	200m

**Range stated is optimum, direct line of sight. In worst conditions this can be reduced by over 50%

Additional Receivers

Part Number	Description	Power Supply
HORNETPRO-8R4	4 ch Receiver	6-32Vdc
HORNETPRO-8R2M	2 ch Receiver	230Vac

Custom Systems

Fobber keyfobs can be customised with logo, colour or complete custom plastic housing for unique Branding. Please contact Sales for further info.



Technical specifications

Transmitters: FOBBER Transmitter

Enclosure Rating: Standard IP68
Battery Type: CR2032 (supplied)
Battery Life: 2 years @ approx. 50 1/2second presses p/day
Dimensions: 90 x 54 x 27 mm

Electrical Characteristics	Min	Typical	Max	Units
Supply Voltage	2.9	3	3.3	V
Supply Current		17		mA
Frequency:		869.50		MHz
RF Output Power (ERP)	-		10	mW
RF Bandwidth		60		KHz



Receiver Unit

Enclosure Rating: IP68
Dimensions: 130 x 112 x 42 mm (not including antenna)
Operating Temperature: -10 to +50° Celsius.

Electrical Characteristics	MIN	TYPICAL	MAX	DIMENSION
Supply Voltage for Low Voltage version	6		32	Vdc or ac
Supply Voltage for high Voltage version		230		Vac
Relay Rating*		5	12	A
Supply Current : Quiescent All (4) relays operating*		25 140		mA
Time delay from Tx on Switch to Rx Relay operation		30		mS
Time delay from Tx sw relax to Rx Relay release		30		mS

*The relay contacts in this unit are for functional use only and must not be used for isolation purposes

Mechanical Dimensions

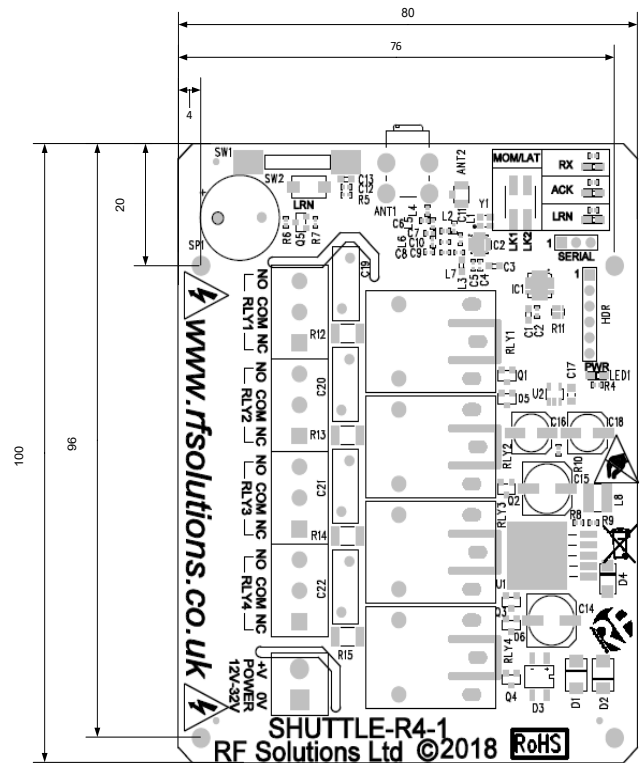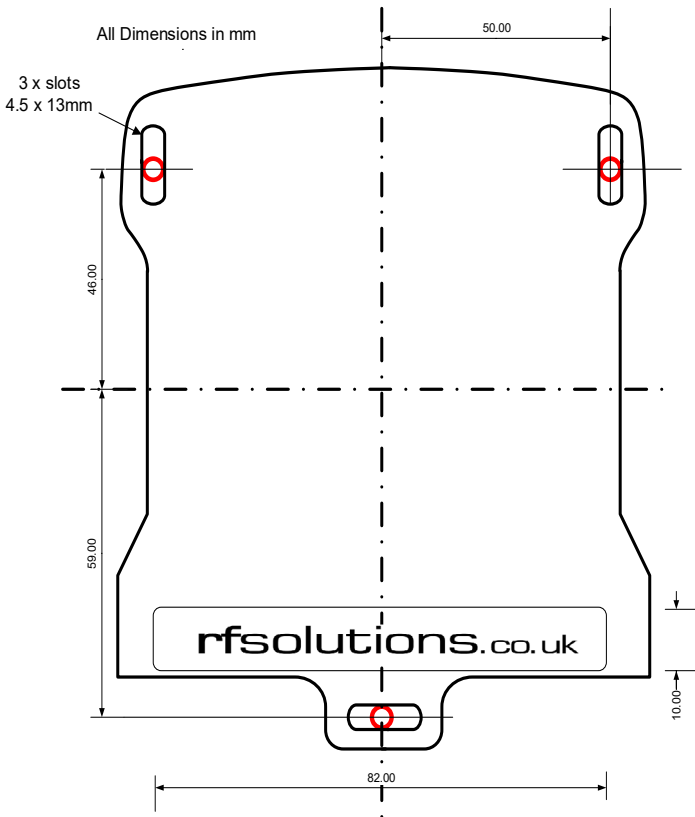

Measurements in mm drawing not to scale

RF Solutions Ltd. Recycling Notice

Meets the following EC Directives:

DO NOT

Discard with normal waste, please recycle.

ROHS Directive 2011/65/EU and amendment 2015/863/EU

Specifies certain limits for hazardous substances.

WEEE Directive 2012/19/EU

Waste electrical & electronic equipment. This product must be disposed of through a licensed WEEE collection point. RF Solutions Ltd., fulfils its WEEE obligations by membership of an approved



Waste Batteries and Accumulators Directive 2006/66/EC

Where the batteries are fitted, before recycling the product, the batteries must be removed and disposed of at a licensed collection point. RF Solutions battery producer number **BPRN00060**.

Disclaimer:

Whilst the information in this document is believed to be correct at the time of issue, RF Solutions Ltd does not accept any liability whatsoever for its accuracy, adequacy or completeness. No express or implied warranty or representation is given relating to the information contained in this document. RF Solutions Ltd reserves the right to make changes and improvements to the product(s) described herein without notice. Buyers and other users should determine for themselves the suitability of any such information or products for their own particular requirements or specification(s). RF Solutions Ltd shall not be liable for any loss or damage caused as a result of user's own determination of how to deploy or use RF Solutions Ltd's products. Use of RF Solutions Ltd products or components in life support and/or safety applications is not authorised except with express written approval. No licences are created, implicitly or otherwise, under any of RF Solutions Ltd's intellectual property rights. Liability for loss or damage resulting or caused by reliance on the information contained herein or from the use of the product (including liability resulting from negligence or where RF Solutions Ltd was aware of the possibility of such loss or damage arising) is excluded. This will not operate to Limit or restrict RF Solutions Ltd's liability for death or personal injury resulting from its negligence.