




1 Channel Mini Receiver


FERRET 6-24Vdc

Features

- 1 Relay Changeover Contacts
- Switches up to 1Kw
5A@230Vac
- Range up to 1KM
(Depending on Transmitter)
- Secure data protocol
- Easy pairing
- Compact Size 23.5x76mm
- Push Fit Wire Terminals
- Supply 6-24Vdc
- Optional 110-230VAC PSU
Module
- CE compliant

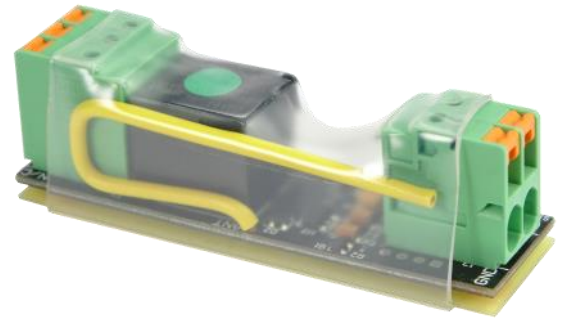

PSU Module 110-230Vac

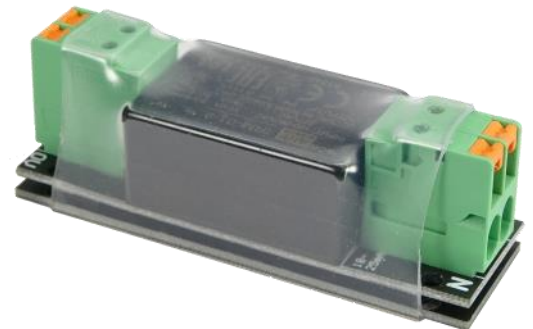

Applications

- Commercial Control
- Remote switching
- Remote lights

Description

The FERRET modules provide an easy “plug and Play” Remote Control Receiver for many applications. The relay output provides Changeover contacts rated 5A at 230Vac to a resistive load.

The FERRET Receiver operates from a 6-24Vdc and all connections are via easy screwless terminals.


Ferret is compatible with many RF Solutions Transmitters and can be combined together to provide a remote control.

The PSU module provides a 110-230Vac input with 12V output which can be used as a power supply for the Ferret Receiver module.

Please note this product is **for Professional Use Only.**


Ordering Information

FERRET Receiver 6-24Vdc

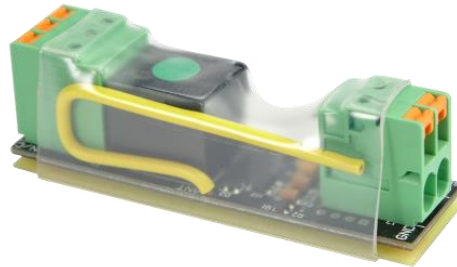

Part No	Description
FERRET-4R1	Receiver module 6-24V version 433MHz
FERRET-8R1	Receiver module 6-24V version 868MHz
FERRET-9R1	Receiver module 12V version 918MHz

110—230Vac Power Supply Module

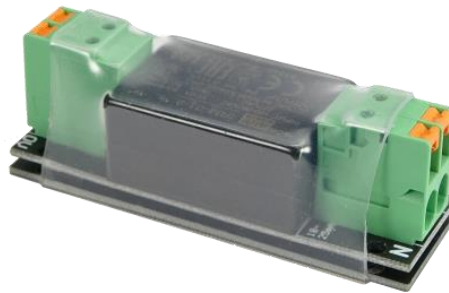

Part No	Description
FERRET-PSU	110—230Vac to 12V Power Supply for FERRET RX

Intended Use

Ferret Receiver intended use is to provide a switching Changeover contact to control an appliance via RF control. The essential performance of the Ferret Receiver is to receive signals from an RF Transmitter for control of the Load circuit.



Safety Warning using 110—230Vac Version

- Installation Failure to follow the instructions may result in risk of injury to persons or property.
- Personnel installing and maintaining this equipment must be qualified Electricians with appropriate knowledge and experience who can identify and prevent Electrical hazards.
- Product is not independently isolated, ISOLATE the mains electricity supply before connecting and observe any relevant safety precautions. Product must be connected to a switch fused (spur/supply) or BS 1363 Plug. It is recommended a single Fuse Spur is used to supply the FERRET and Load jointly so that they are isolated together.
- When Used to switch mains voltage Loads ensure the circuitry is suitable protected to prevent electric shock.

Connections




Connecting the Relay Output

This receiver provides a changeover relay switch each capable of switching up to 1.2KW (5A @ 230V). The output relay provides an isolated switch. Connections are Common (COM),


Relay Operation:

Momentary: The Relay output will be active for as long as the user holds the Transmitter switch.

Latching: The Receiver output will change State each time the Transmitter switch is pressed.

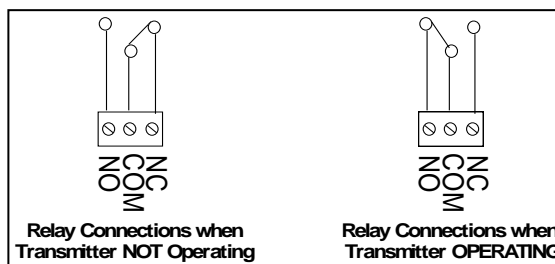

Connecting the 110-230Vac PSU

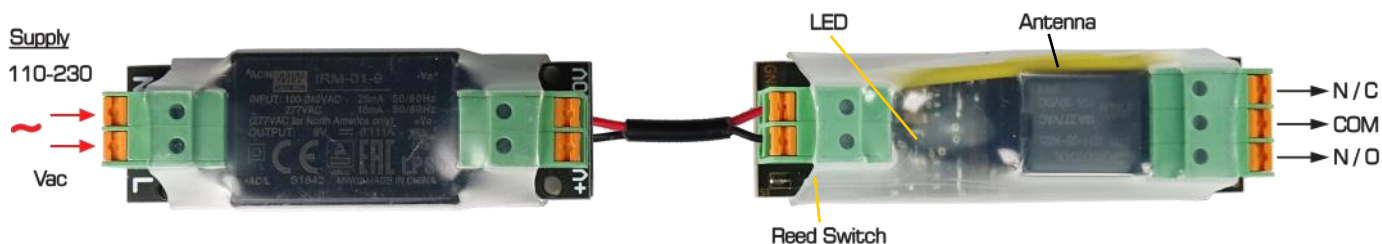

Getting Started


1. Connect power
2. Connect your load to the Relay output
3. Pair a Transmitter Switch (max pairings =30 Transmitters)
4. Set the output to Latch / Momentary

LED Operation

The Receiver LED will illuminate when any valid RF signal is present, and when the reed switch is being activated by a magnet.


Pairing and Configuring

A magnet is used to perform these functions. Swipe or briefly present and remove the magnet near to the Reed switch.

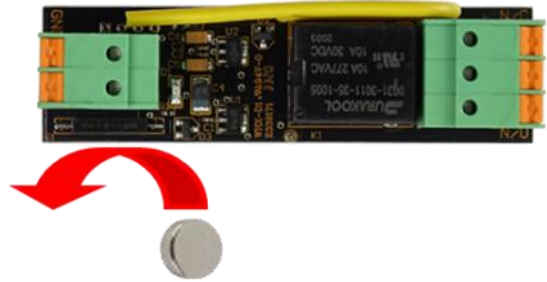


Pairing a Transmitter

Pair a Transmitter Switch to Ferret

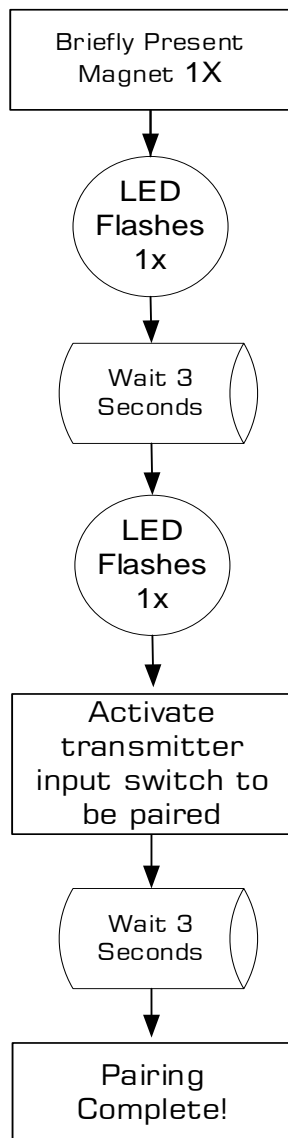


Change the Relay Action Momentary / Latching

Each time This process is completed the Relay operation is changed (Mom Latch)

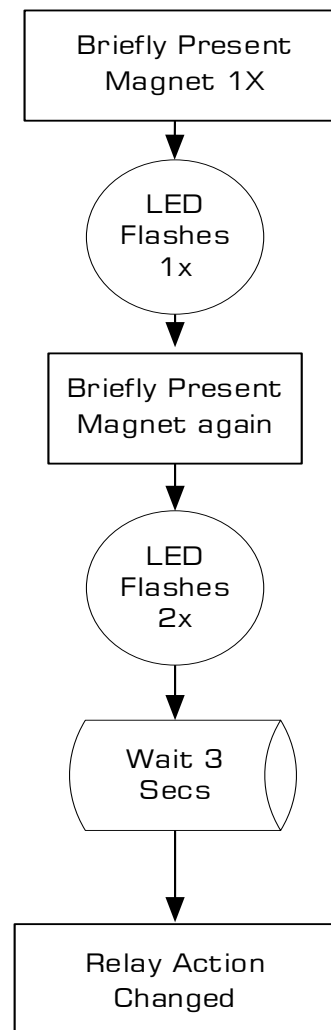

Erase all Transmitters

Erases all Transmitters from Receiver

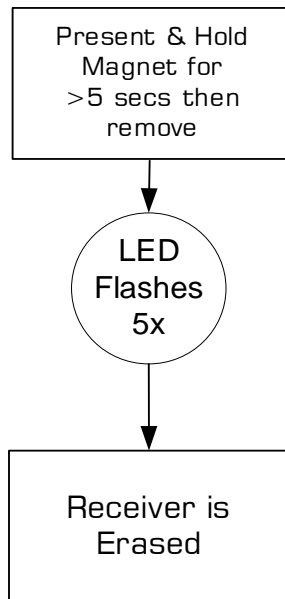

Technical specifications

Operating Temperature: -10 to +55° Celsius.

IP Rating N/A the module is supplied within heat shrink for electrical insulation only this provides no water or dust ingress protection.

Product Dimensions

Receiver

23.5mm X 26.5mm X 76mm

PSU

24.5mm X 26.5mm X 71.5mm

Electrical Characteristics	MIN	Typical	MAX	Dimension
Supply Voltage for Low Voltage version	6		27	Vdc
Supply Voltage for High Voltage Module	110		240	Vac
Relay Rating		4*	5	A
Supply Current : Quiescent Relays operating		20 45		mA
Time from Tx On to Rx Relay On		25		mS
Time from Tx Off to Rx Relay Off		25		mS

* Relay is capable of 5A continuous into a Resistive Load.

Simplified Declaration of Conformity (RED)

BG - С настоящото RF Solutions Limited декларира, че този тип радиосъоръжение е дефинирано в този документ в съответствие с Директива 2014/53/ЕС. Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес: www.rfsolutions.co.uk

CS - Tímto RF Solutions Limited prohlašuje, že typ rádiového zařízení definované v tomto dokumentu je v souladu se směrnicí 2014/53/EU. Úplné znění EU prohlášení o shodě je k dispozici na této internetové adrese: www.rfsolutions.co.uk

DA - Hermed erklærer RF Solutions Limited, at radioudstyrstypen defineret i dette dokument er i overensstemmelse med direktiv 2014/53/EU. EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse: www.rfsolutions.co.uk

DE - Hiermit erkläre RF Solutions Limited, dass der Funkanlagentyp in diesem Dokument definiert der Richtlinie 2014/53/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: www.rfsolutions.co.uk

EL - Με την παρούσα ο/η RF Solutions Limited, δηλώνει ότι ο ραδιοεξοπλισμός ορίζεται σε αυτό το έγγραφο πληροί την οδηγία 2014/53/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο: www.rfsolutions.co.uk

EN - Hereby, RF Solutions Limited declares that the radio equipment type defined within this document is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.rfsolutions.co.uk

ES - Por la presente, RF Solutions Limited declara que el tipo de equipo radioeléctrico definido dentro de este documento es conforme con la Directiva 2014/53/UE. El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente: www.rfsolutions.co.uk

ET - Käesolevaga deklareerib RF Solutions Limited, et käesolev raadioseadme tüüp määratletud selles dokumendis vastab direktiivi 2014/53/EL nõuetele. ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil: www.rfsolutions.co.uk

FI - RF Solutions Limited vakuuttaa, että radiolaitetyyppi määriteltä selles dokumendis on direktiivin 2014/53/EU mukainen. EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa: www.rfsolutions.co.uk

FR - Le soussigné, RF Solutions Limited, déclare que l'équipement radioélectrique du type défini dans ce document est conforme à la directive 2014/53/UE. Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante: www.rfsolutions.co.uk

HR - RF Solutions Limited ovime izjavljuje da je radijska oprema tipa definirani u ovom dokumentu u skladu s Direktivom 2014/53/EU. Cjeloviti tekst EU izjave o skladnosti dostupan je na sljedećoj internetskoj adresi: www.rfsolutions.co.uk

HU - RF Solutions Limited igazolja, hogy a dokumentumban meghatározottak szerinti típusú rádióberendezés megfelel a 2014/53/EU irányelvnek. Az EU-megfelelőségi nyilatkozat teljes szövege elérhető a következő internetes címen: www.rfsolutions.co.uk

IT - Il fabbricante, RF Solutions Limited, dichiara che il tipo di apparecchiatura radio definito all'interno di questo documento è conforme alla direttiva 2014/53/UE. Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: www.rfsolutions.co.uk

LT - Aš, RF Solutions Limited, patvirtinu, kad radijo įrenginių tipas apibrėžta šiame dokumente atitinka Direktyvą 2014/53/ES. Visas ES atitikties deklaracijos tekstas prieinamas šiuo internetu adresu: www.rfsolutions.co.uk

LV - Ar šo RF Solutions Limited deklarē, ka radioiekārta kas definēts šajā dokumentā atbilst Direktīvai 2014/53/ES. Pilns ES atbilstības deklarācijas teksts ir pieejams šādā interneta vietnē: www.rfsolutions.co.uk

MT - B'dan, RF Solutions Limited, niddikjara li dan it-tip ta' tagħmir tar-radju definit f'dan id-dokument huwa konformi mad-Direttiva 2014/53/UE. It-test kollu tad-dikjarazzjoni ta' konformità tal-UE huwa disponibbli f'dan l-indirizz tal-Internet li gej: www.rfsolutions.co.uk

NL - Hierbij verklaar ik, RF Solutions Limited, dat het type radioapparaat gedefinieerd in dit document conform is met Richtlijn 2014/53/EU. De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres: www.rfsolutions.co.uk

PL - RF Solutions Limited niniejszym oświadczam, że typ urządzenia radiowego zdefiniowane w tym dokumencie jest zgodny z dyrektywą 2014/53/UE. Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym: www.rfsolutions.co.uk

PT - O(a) abaixo assinado(a) RF Solutions Limited declara que o presente tipo de equipamento de rádio definido neste documento está em conformidade com a Diretiva 2014/53/UE. O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet: www.rfsolutions.co.uk

RO - Prin prezenta, RF Solutions Limited declară că tipul de echipamente radio definit în acest document este în conformitate cu Directiva 2014/53/UE. Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet: www.rfsolutions.co.uk

SK - RF Solutions Limited týmto vyhlasuje, že rádiové zariadenie typu definované v tomto dokumente je v súlade so smernicou 2014/53/EÚ. Úplné EÚ vyhlásenie o zhode je k dispozícii na tejto internetovej adrese: www.rfsolutions.co.uk

SL - RF Solutions Limited potrjuje, da je tip radijske opreme opredeljeno v tem dokumentu skladen z Direktivo 2014/53/EU. Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: www.rfsolutions.co.uk

SV - Härmed försäkrar RF Solutions Limited att denna typ av radioutrustning definieras i detta dokument överensstämmer med direktiv 2014/53/EU. Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress: www.rfsolutions.co.uk

RF Solutions Ltd. Recycling Notice

Meets the following EC Directives:

DO NOT

Discard with normal waste, please recycle.

ROHS Directive 2011/65/EU and amendment 2015/863/EU

Specifies certain limits for hazardous substances.

WEEE Directive 2012/19/EU

Waste electrical & electronic equipment. This product must be disposed of through a licensed WEEE collection point. RF Solutions Ltd., fulfils its WEEE obligations by membership of an approved compliance scheme. Environment agency registration number: **WEE/J80104WV**.



Waste Batteries and Accumulators Directive 2006/66/EC

Where batteries are fitted, before recycling the product, the batteries must be removed and disposed of at a licensed collection point.

RF Solutions battery producer number: **BPRN00060**.

Disclaimer:

Whilst the information in this document is believed to be correct at the time of issue, RF Solutions Ltd does not accept any liability whatsoever for its accuracy, adequacy or completeness. No express or implied warranty or representation is given relating to the information contained in this document. RF Solutions Ltd reserves the right to make changes and improvements to the product(s) described herein without notice. Buyers and other users should determine for themselves the suitability of any such information or products for their own particular requirements or specification(s). RF Solutions Ltd shall not be liable for any loss or damage caused as a result of user's own determination of how to deploy or use RF Solutions Ltd's products. Use of RF Solutions Ltd products or components in life support and/or safety applications is not authorised except with express written approval. No licences are created, implicitly or otherwise, under any of RF Solutions Ltd's intellectual property rights. Liability for loss or damage resulting or caused by reliance on the information contained herein or from the use of the product (including liability resulting from negligence or where RF Solutions Ltd was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict RF Solutions Ltd's liability for death or personal injury resulting from its negligence.